


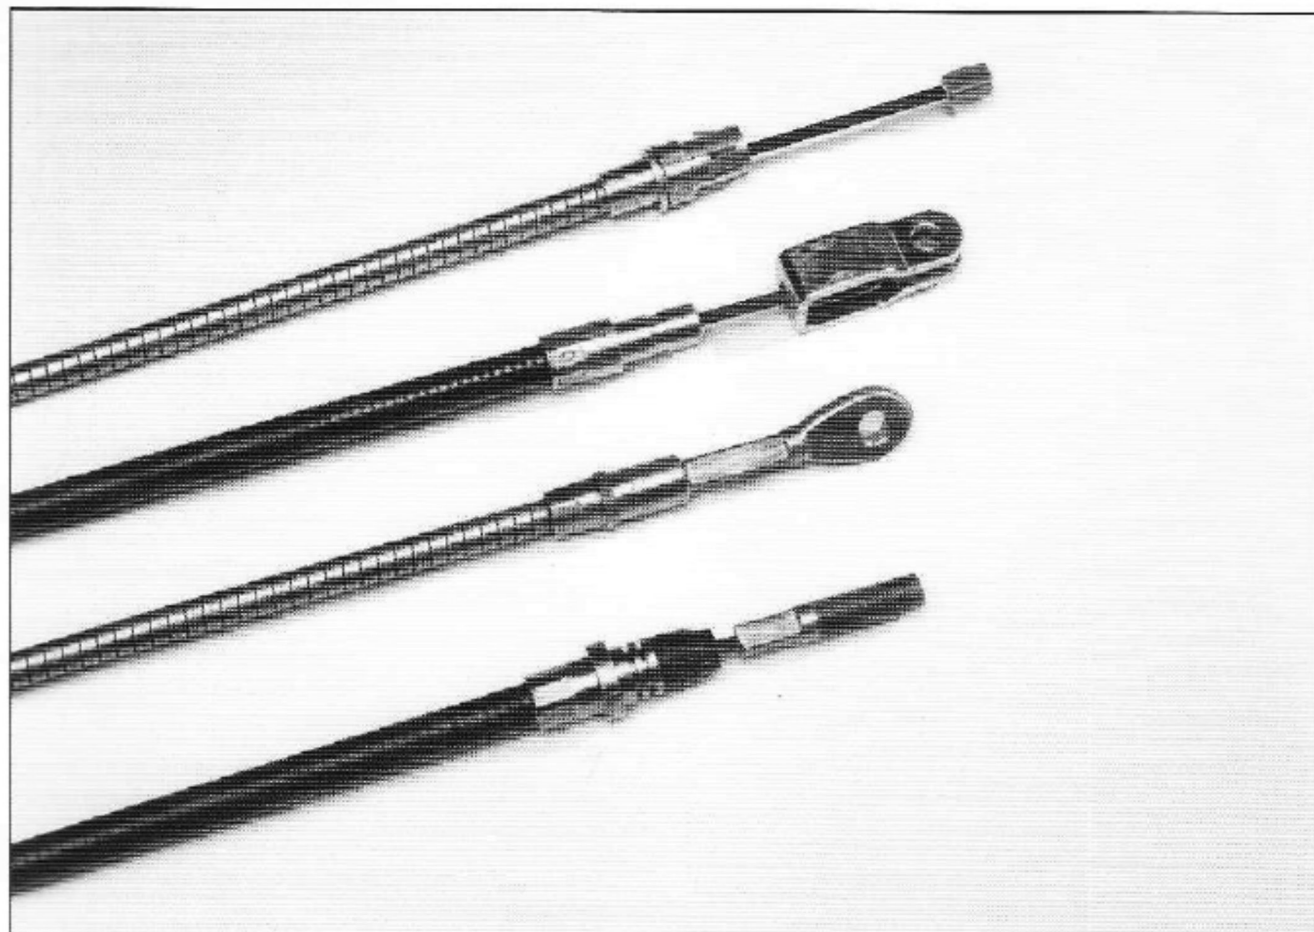

1/8" PBT BRAKE CABLES

PBT is short for Polybutylene Terephthalate. These cables utilize PBT coated strand, PBT liner, a patented seal with internal and external features and boundary lubrication. All of these features combine to give Orscheln cables far better corrosion protection than ordinary galvanized constructions.


The 1/8" PBT cables are designed for use in light to medium duty applications. These cables are rated at 1,200 pounds or less. Since the components used on these cables are common, we are able to offer lower costs and shortened lead-times.

Again, we recommend that any questions concerning this type of cable be referred to either our Sales or Engineering Departments.







1/8 PBT

TYPICAL 1/8 PBT CABLE ASSEMBLY CONSTRUCTION

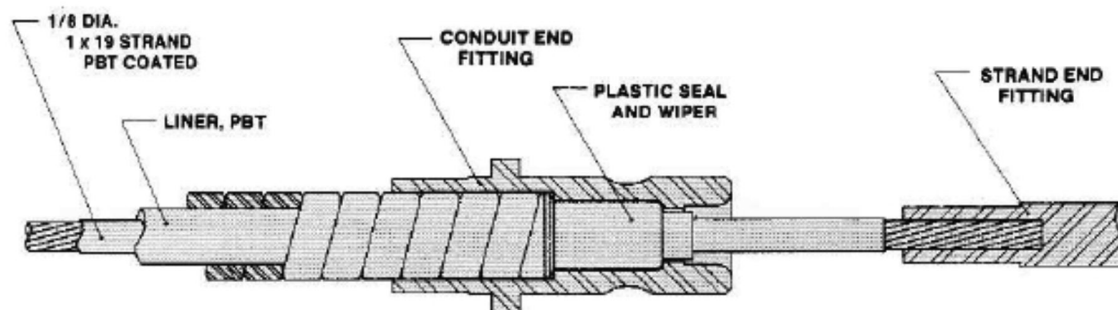




CONDUIT END FITTINGS

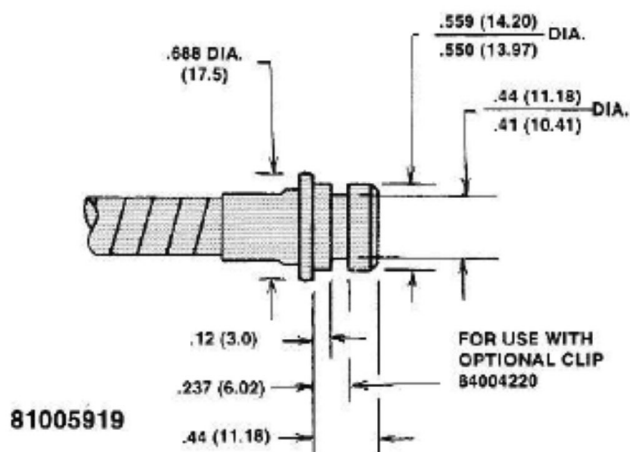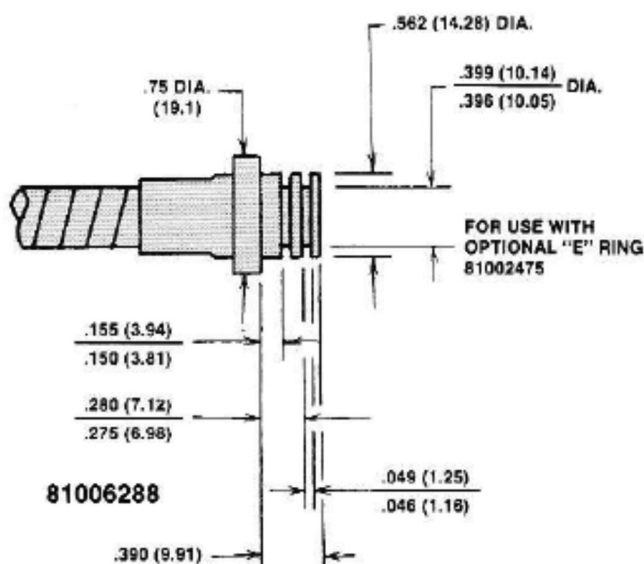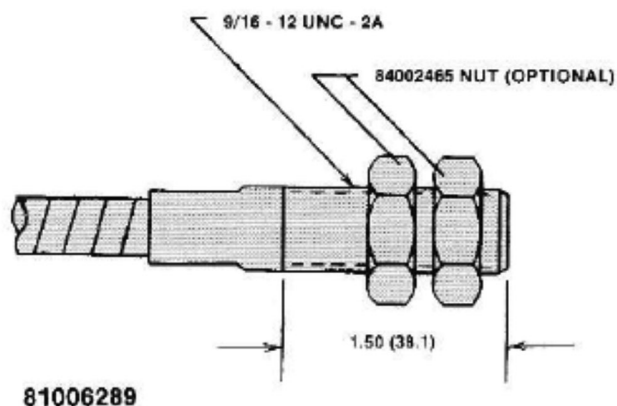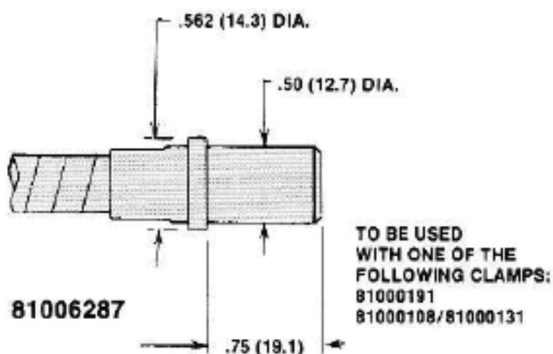




CONDUIT END FITTINGS

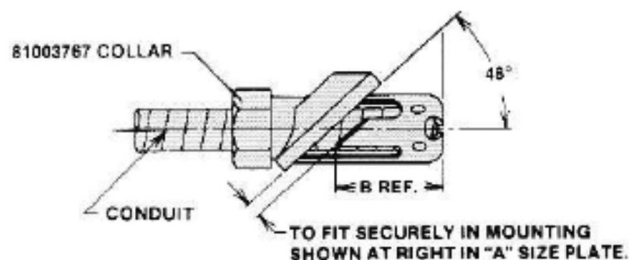


PART NO.	A	B
95001244	.130/.105 (3.30/2.67)	1.03 (26.2)
95001388	.205/.170 (5.21/4.32)	.93 (23.6)

SNAP-IN FITTING TO HOLD SECURE
IN A .559/.551 (14.20/14.00) DIA. HOLE
THRU A "X" MAX. PLATE THICKNESS WITH
PRONGS RETURNING TO .600 (15.24) DIA. MIN.

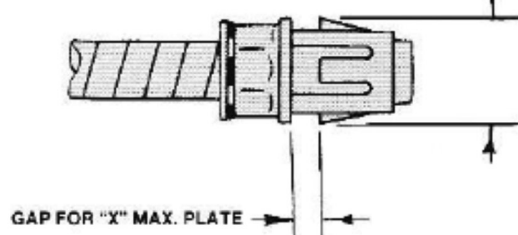

PART NO.	"X" MAX. PLATE
95001218	.133 (3.38)
95001434	.193 (4.90)

SNAP-IN FITTING TO HOLD SECURE
IN A .580/.575 (14.74/14.60) DIA. HOLE
THRU A "X" MAX. PLATE THICKNESS WITH
PRONGS RETURNING TO .620 (15.74) DIA. MIN.

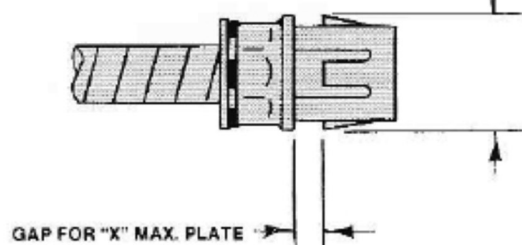


PART NO.	"X" MAX. PLATE
95001278	.133 (3.38)
95001279	.200 (5.08)




CONDUIT MOUNTING CLAMPS

81000108 CABLE CLAMP 81000131 LINK SPACER

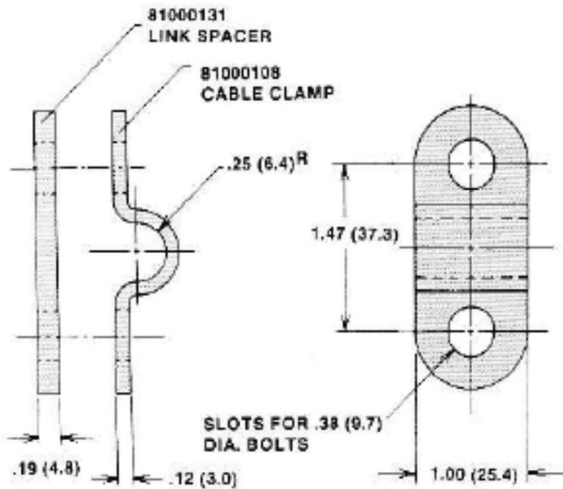


81000191 CABLE CLAMP

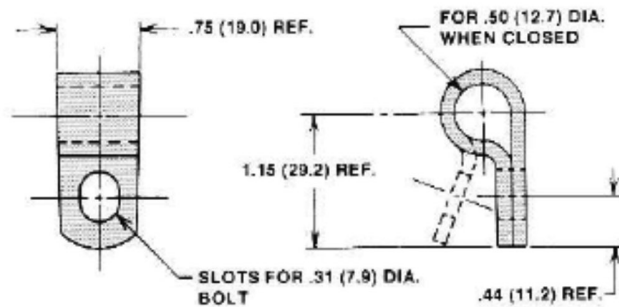


CONDUIT MOUNTING CLIPS

84002475



OPTIONAL WITH END FITTINGS
81002456
81006102
81006288




84004220

OPTIONAL WITH
END FITTINGS
81005919
81006103





1/8 PBT

OPTIONAL STRAND END FITTINGS

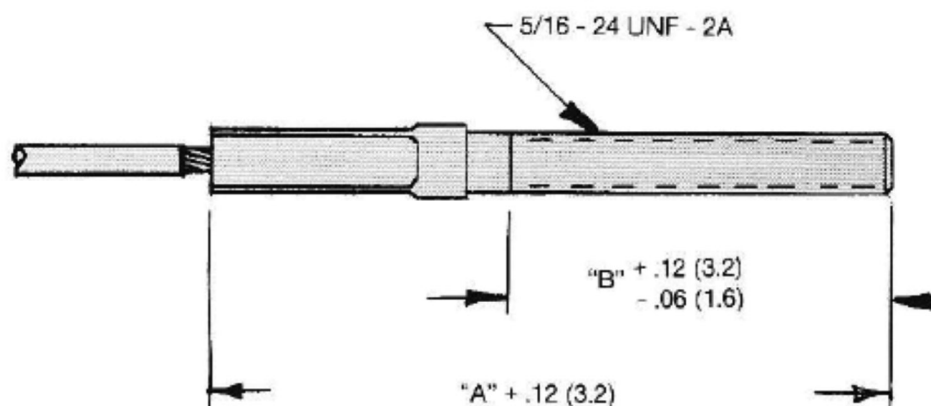





PART NUMBER	A	B
81002491	2.88 (73.2)	1.50 (38.1)
81002494	3.62 (92.0)	2.25 (57.2)

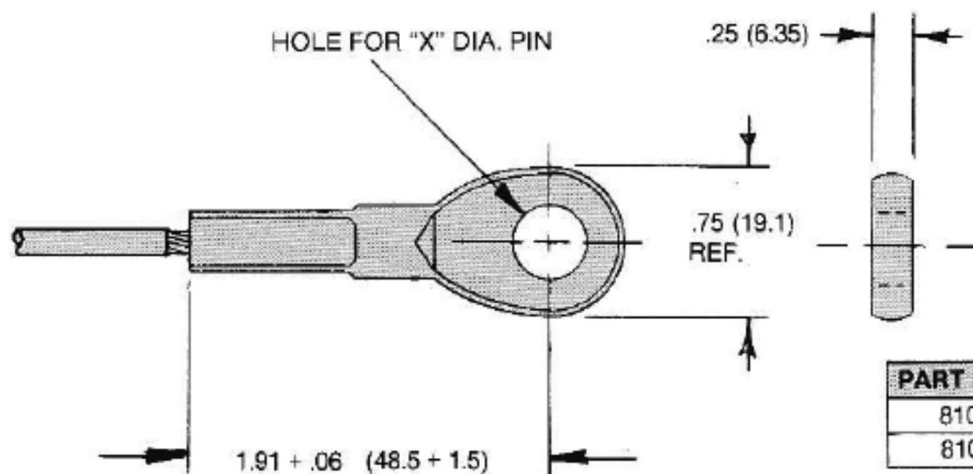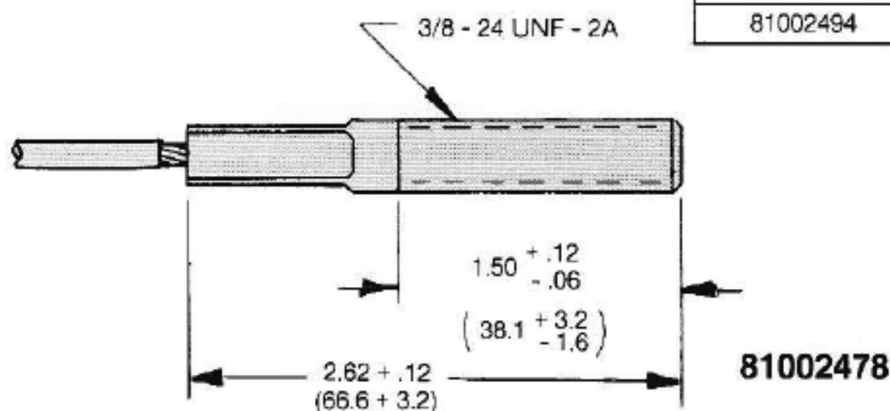

PART NUMBER	"X" DIA. PIN.
81002510	.31 (8.0)
81002519	.38 (9.5)




STRAND END FITTINGS

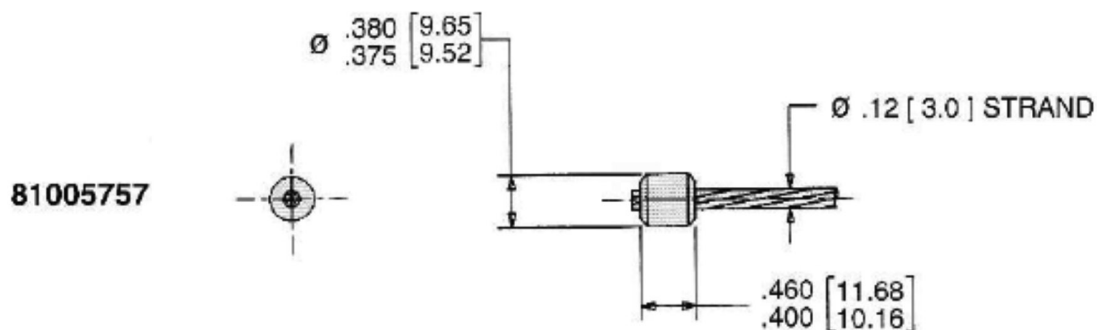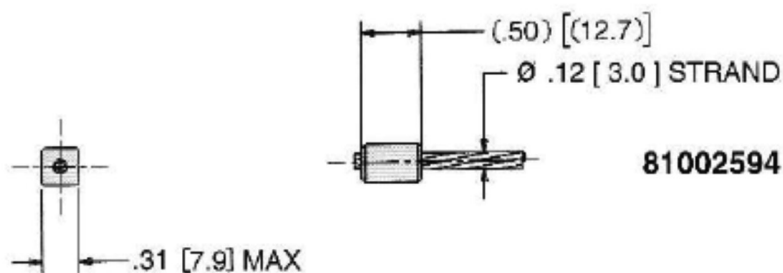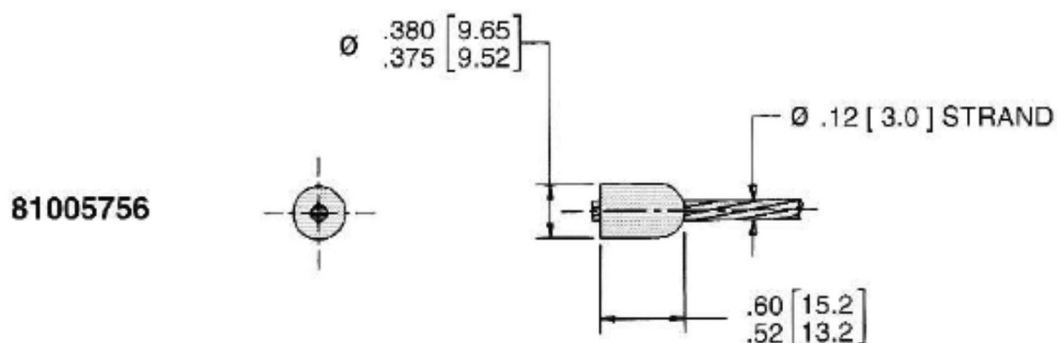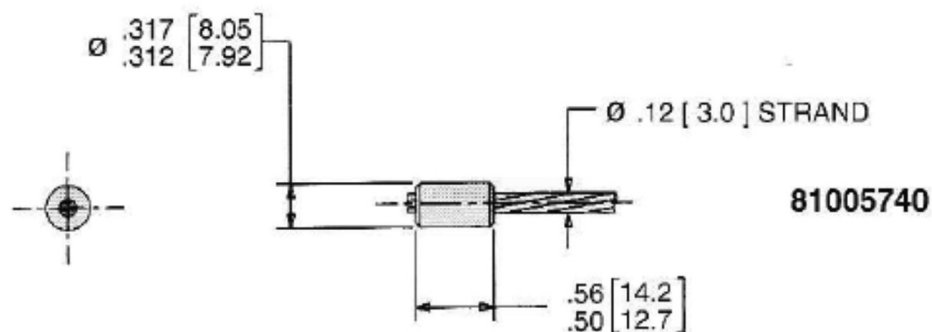




1/8 PBT

1/8 CLEVIS

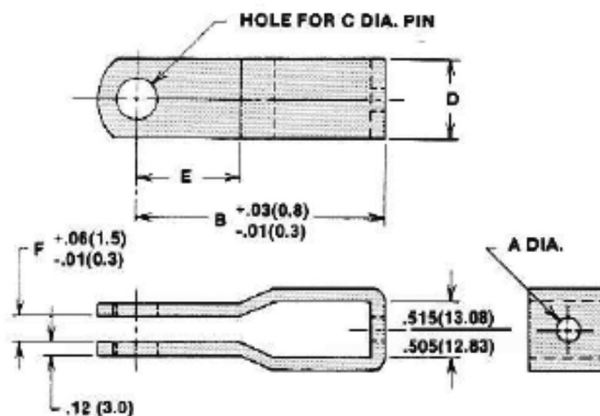


PART NO.	A	B	C	D	E	F
*81002454	.210(5.33)	1.56(39.6)	.31(7.9)	.62(15.8)	.31(7.9)	.19(4.8)
81002535	.210(5.33)	2.38(60.5)	.31(7.9)	.75(19.0)	1.00(25.4)	.25(6.4)
81002536	.210(5.33)	2.38(60.5)	.38(9.7)	.75(19.0)	1.00(25.4)	.25(6.4)
81002537	.210(5.33)	1.75(44.4)	.31(7.9)	.62(15.8)	.38(9.7)	.25(6.4)
81002646	.359(9.12)	1.75(44.4)	.31(7.9)	.75(19.0)	.38(9.7)	.25(6.4)
81002685	.359(9.12)	2.38(60.5)	.31(7.9)	.75(19.0)	1.00(25.4)	.25(6.4)
81002688	.359(9.12)	4.00(101.6)	.38(9.7)	.75(19.0)	.50(12.7)	.25(6.4)
81002963	.359(9.12)	3.00(76.2)	.31(7.9)	.75(19.0)	.75(19.0)	.25(6.4)

* Designed for use in Orscheln COWL TYPE lever assemblies.

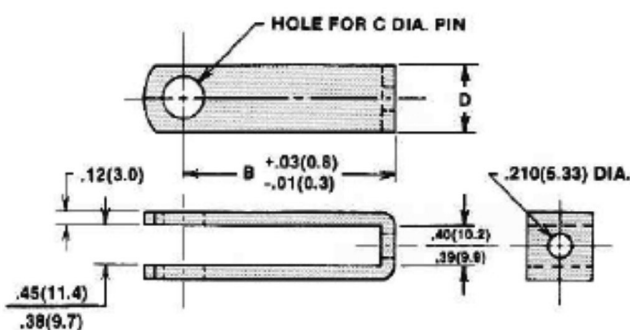

PART NO.	B	C	D
81002545	1.62(41.2)	.31(7.9)	.62(15.8)
81002546	2.00(50.8)	.31(7.9)	.62(15.8)
81002550	2.00(50.8)	.38(9.7)	.75(19.0)

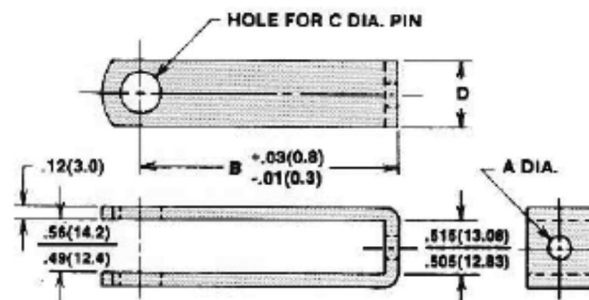

PART NO.	A	B	C	D
*81002467	.210(5.33)	1.94(49.3)	.38(9.7)	.75(19.0)
81002578	.210(5.33)	1.88(47.8)	.31(7.9)	.62(15.8)
81002635	.323(8.20)	2.50(63.5)	.31(7.9)	.62(15.8)
81002914	.323(8.20)	2.50(63.5)	.38(9.7)	.75(19.0)

* For use with Orscheln BELL CRANK TYPE lever assemblies.



EQUALIZER 81007269

